


SAFETY CRITICAL COMPONENT
REPLACE ONLY WITH SAME
TYPE AND RATING.

- NOTES**
- (1) C11 = 4n7 500V ON STANDARD HEAD
C11 = 1nF 500V ON COMBO & DELUXE
 - (2) C13 = 4.70pF STANDARD --- = 100pF COMBO & DELUXE
 - (3) C14 NOT FITTED ON STANDARD HEAD,
COMBO OR DELUXE
 - (4) R29 = 4.7K STANDARD
R29 = 22K COMBO & DELUXE
 - (5) R47,48 = LINK STANDARD
R47,48 = 680K COMBO & DELUXE
 - (6) CON9 ONLY FITTED ON COMBO & DELUXE
 - (7) C17 = LINK STANDARD
C17 = 100nF 630V COMBO & DELUXE

STOCK No. S167
PART No. 1310B5NN

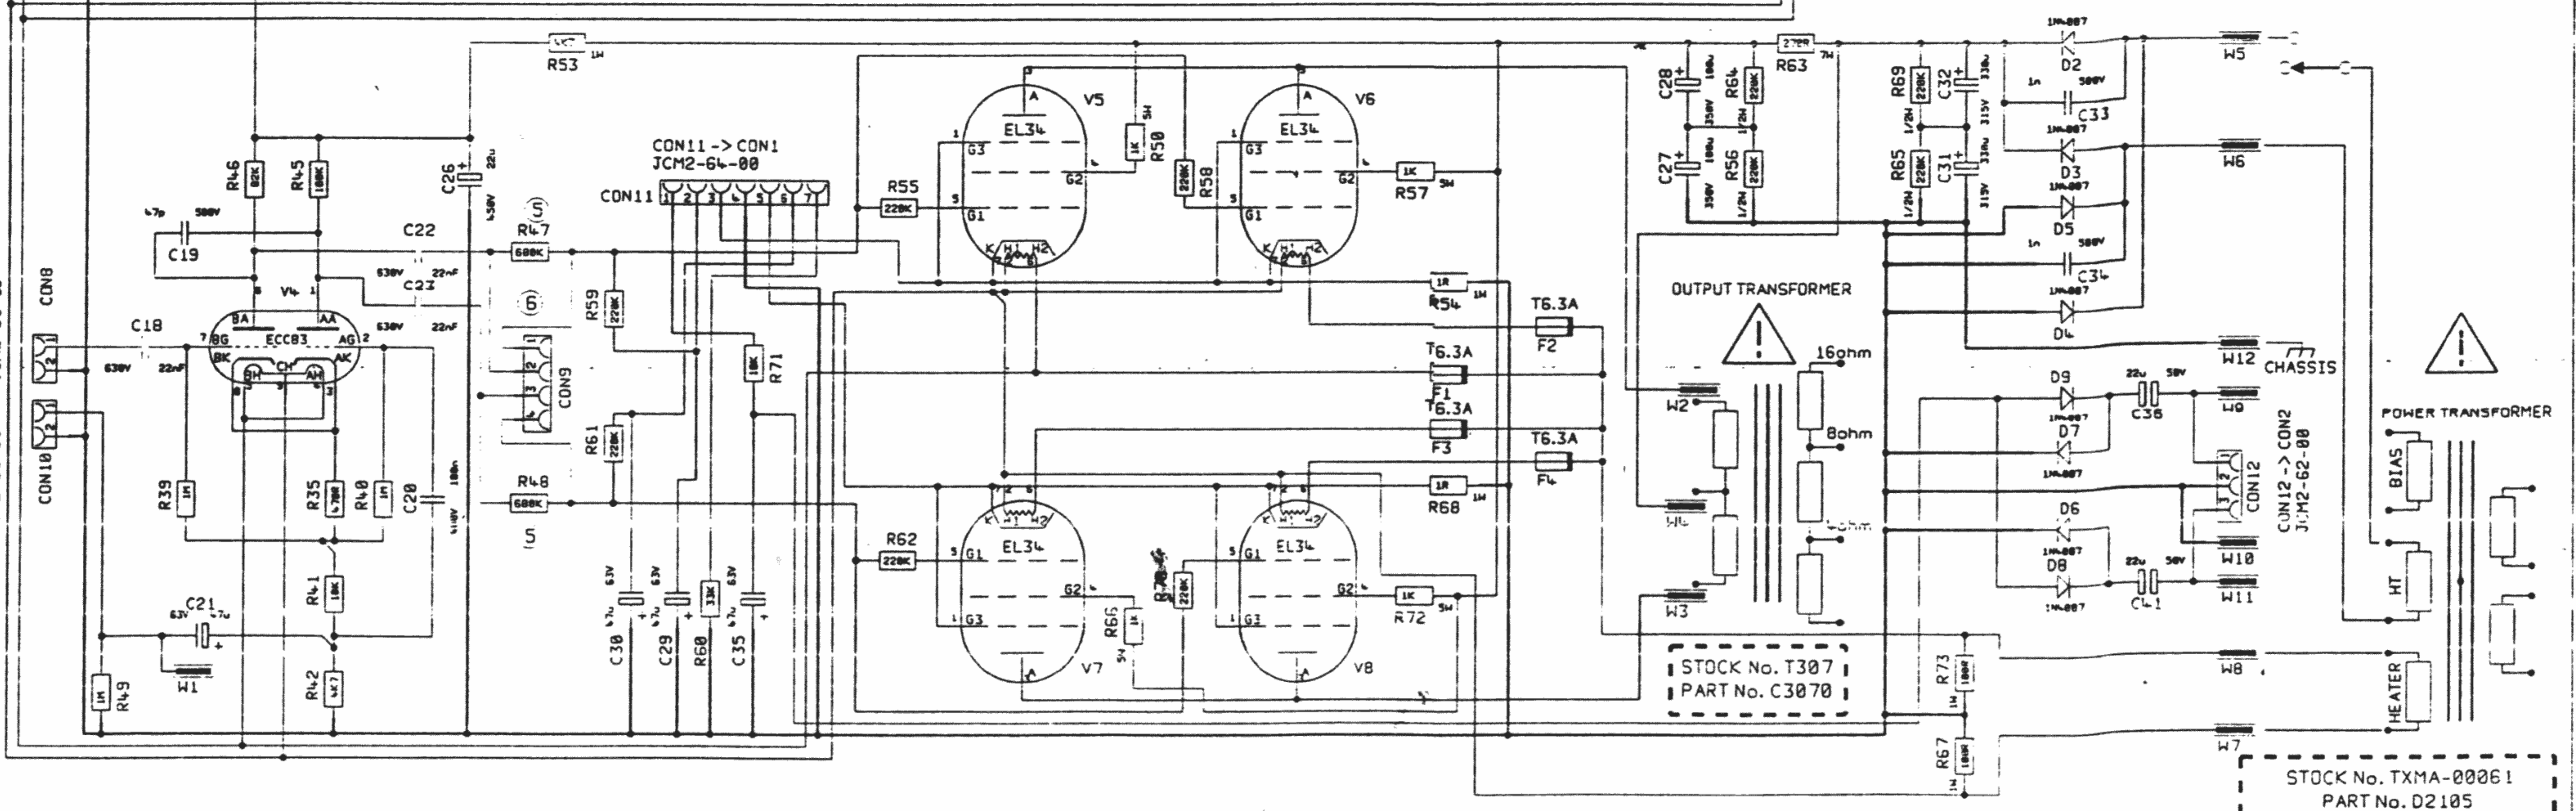

ALL OTHER HOLES -			X = (THROUGH PLATED)				MATERIAL		DIMENSIONS IN		TITLE	
1	PRODUCTION	30/4/97	A	E	J	N	MATERIAL THICKNESS	TOLERANCE (UNLESS OTHERWISE STATED)		JCM2000 SUPERLEAD STANDARD		
C	PRE-PRODUCTION	19/3/97	B	F	K	P	DRAWN S.G.	DATE 19/3/97	DRAWING		JCM2-60-00.DGM	
ISS	ECO NUMBER	DATE	C	G	L	G	CHECKED	DATE 23-6-97	PARTIAL		1	
			D	H	M	R	APPROVED	DATE	JCM2000			



JCM2000
SUPERLEAD STANDARD
DRAWING
JCM2-60-00.DGM